



DS-2CD2012-I 1.3MP IR Mini Bullet Camera

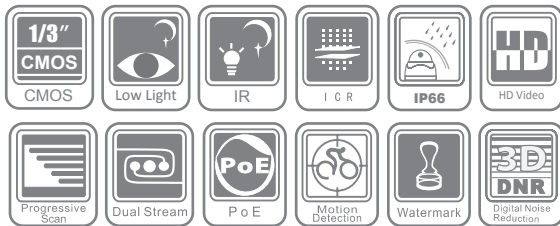

Key features

- 1.3 megapixel high resolution
- HD video output
- Low illumination
- 3D DNR & DWDR & BLC
- IP66 rating
- IR range: up to 30m
- True day / night

Dimensions

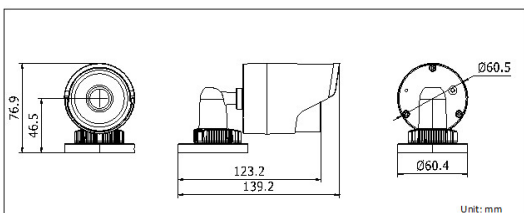

Specifications

| DS-2CD2012-I | |
|-----------------------------|--|
| Camera | |
| Image sensor | 1/3" progressive scan CMOS |
| Min. illumination | 0.01 lux @F1.2, AGC ON, 0 lux with IR |
| Shutter time | 1/25s ~ 1/100,000s |
| Lens | 4mm @F2.0 (6mm, 12mm optional) Angle of view: 69.4° |
| Lens mount | M12 |
| Day & night | IR cut filter with auto switch |
| Digital noise reduction | 3D DNR |
| Wide dynamic range | Digital WDR |
| Compression Standard | |
| Video compression | H.264 / MJPEG |
| H.264 codec profile | Main profile |
| Bit rate | 32 Kbps ~ 16 Mbps |
| Image | |
| Max. Image Resolution | 1280 × 960 |
| Frame rate | 50Hz: 25fps (1280 × 960), 25fps (1280 × 720) 60Hz: 30fps (1280 × 960), 30fps (1280 × 720) |
| Image settings | Saturation, brightness, contrast, sharpness adjustable through client software or web browser |
| BLC | Yes, zone configurable |
| Network | |
| Network storage | NAS (iSCSI optional) |
| Alarm trigger | motion detection, tampering alarm |
| Protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional) |
| Interoperability | ONVIF, PSIA, CGI |
| Security | User Authentication, reset button, flickerless, dual stream, heartbeat, mirror, watermark |
| Interface | |
| Communication interface | 1 RJ45 10 M / 100 M Ethernet interface |
| General | |
| Operating conditions | -30 °C ~ 60 °C (-22°F ~ 140 °F) humidity 95% or less (non-condensing) |
| Power supply | 12 VDC ± 10% , PoE (802.3af) |
| Power consumption | max. 5W |
| Weather proof rating | IP66 |
| IR range | Up to 30m |
| Dimension | 60.4 x 76.9 x 139.2mm |
| Weight | 500g |

Available model

DS-2CD2012-I

* Product picture and technical specs subject to change without previous notice.
For further information, please contact our local sales team.