


# ABT-S106/S136 ABT-S2010/S2710

EN 54-24

## Ceiling-mounted prompt installation loudspeakers

- ✓ Full compliance with EN 54-24 Standards
- ✓ Certificate of Conformity issued by ITB:  
for ABT-S106/S136: 1488-CPD-0171/W  
for ABT-S2010/S2710: 1488-CPD-0170/W

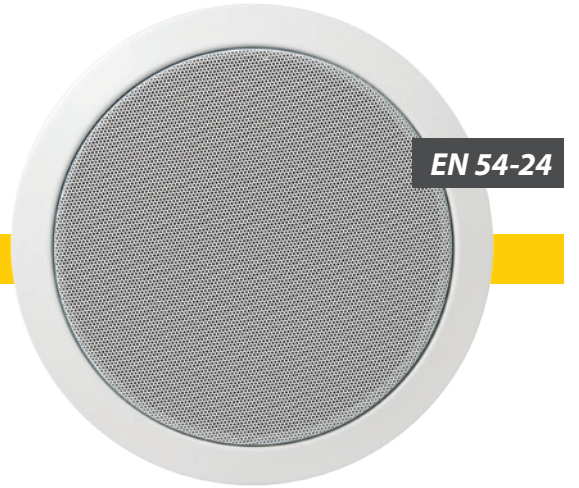

Ceiling-mounted fire alarm loudspeakers ABT-S106 and ABT-S136 are designed for applications which require the minimum size at the maximum sound quality. Their parameters have been carefully selected to match the operating requirements in the rooms exposed to after-sound and high-humidity.

Ceiling mounted fire alarm ABT-S2010 and ABT-S2710 loudspeakers are designed for operations at high acoustic levels and the highest reduction in power supply. Actual wide band high efficiency ensures the best understanding of verbal messages. Their parameters have been carefully selected to comply with false ceiling applications, both at standard and considerably elevated ceiling-to-floor distance.

Thanks to the most advanced technologies the ABT-S series loudspeakers combine excellent acoustic parameters and high aesthetics with resistance to mechanical damages and varying weather conditions. They are distinguished by easy and quick installation.

Quality standards and audio characteristics have been confirmed through multiple tests and trials employing such facilities as e.g. echoproof chamber, resistance and integrity testing equipment, as well as chambers for resistance to weather and air humidity testing.

The need to maintain the best acoustic parameters, even with easily installed fire-protecting screens, was the idea underlying

the design process. The ABT-S series loudspeakers ensure a balanced sound which is extremely important in emission of highly understandable speech and reliable music reproduction.

The series of ceiling-mounted ABT-S loudspeakers is noticeable thanks to its elegant looks. The loudspeaker part which becomes visible after the installation is protected by means of electroplating and covered by a common and aesthetic white paint coat (RAL 9003) – optionally available other colours (RAL palette).

The entire ABT-S series is equipped with a standardized fire dome made of soft steel and supplied with two cable penetrations with rubber glands. Special jig for sling assembling facilitates quick installation. The delivery comprises the 1-metre long sling. Two ceramic blocks and fireproof wiring coupled with temperature limit fuse are located under the screen. This solution ensures 100% protection of the sound-transmitting line from any break or short-circuits which may be produced as a result of loudspeaker burn.


The ABT-S loudspeakers have been successfully tested by means of the most rigorous trials at the temperature of 822°C. The individual power rating is selected by means of connection with applicable transformer branch.

ABT-S series loudspeakers equipped with fire dome and thermal protections entirely comply with EN 54-24 Standards. In order to

ensure 100% consistency with the highest quality standards we test our loudspeakers following the most meticulous procedures that warrant high parameters of sound emission, safety, and reliability.

In spite of the fact our loudspeakers are designed for the highest reliability under fire conditions, their acoustic parameters and attractive low prices make them successful in any and all public address systems.



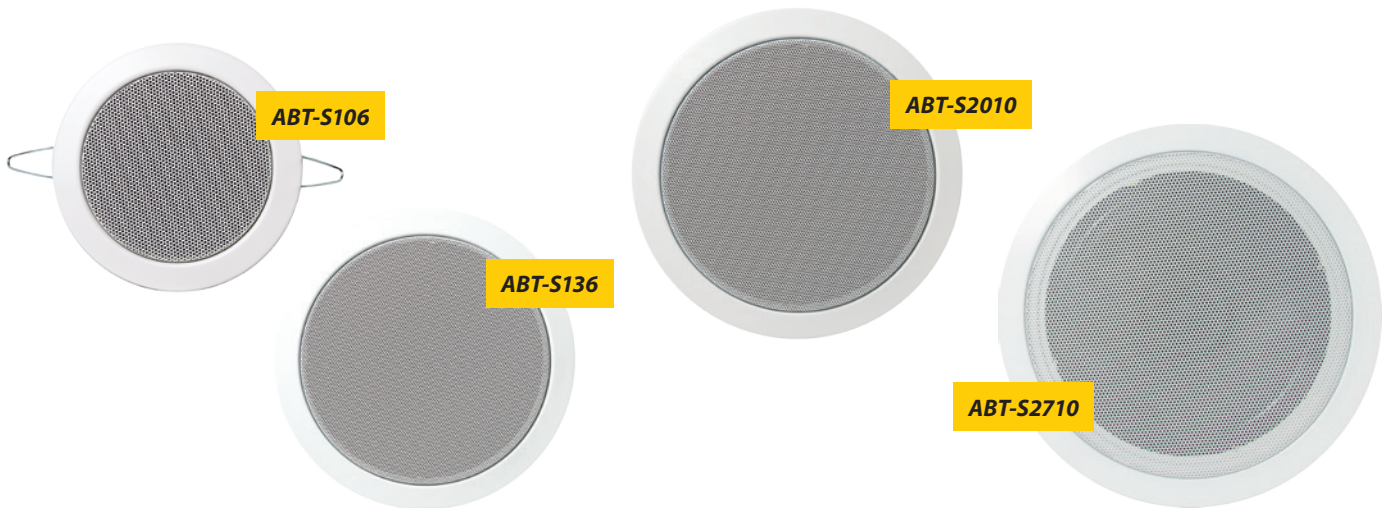

### ABT-S106/S136

- › **Minimum dimensions**
- › **A and C working environment, ideal for bathrooms**
- › **Exceptionally reliable reproduction of full band music**
- › **The highest level of verbal communication understanding**
- › **Elegant looks**
- › **6W transformer allowing a precise selection of loudspeaker output power**
- › **100% protection of line from breaks and short-circuits at the temperature of 822°C**


### ABT-S2010/S2710

- › **High efficiency**
- › **High acoustic pressure level**
- › **Exceptionally reliable full band music reproduction**
- › **The highest level of speech understanding**
- › **Elegant looks**
- › **10W transformer allowing precise selection of loudspeaker output power**
- › **100% protection of line from breaks and short-circuits at the temperature of 822°C**



	ABT-S106	ABT-S136	ABT-S2010	ABT-S2710
<b>Electrical</b>				
Rated power, W	6	6	10	10
Tappings 100 V line, W	6/3/1,5/0,75	6/3/1,5/0,75	10/5/2,5/1,25	10/5/2,5/1,25
Transformer Impedance, Ω 100 V	1667/3333/ 6667/13333	1667/3333/ 6667/13333	1000/2000/ 4000/8000	1000/2000/ 4000/8000
Driver impedance, Ω	8	8	8	8
Effective Frequency Range, Hz	100–20000	60–20000	150–20000	100–20000
Sensitivity @ 4 m, 1 W, dB	65	68	77	78
SPL @ 4 m, Rated power, dB	76	78	92	93
SPL @ 1 m, 1W, dB, Test Signal Bandwidth 300Hz–6 kHz	80	82	94	95
SPL @ 1 m, Rated power, dB, Test Signal Bandwidth 300Hz–6 kHz	88	90	104	105
Dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	180 / 153 / 131 / 80	180 / 131 / 124 / 76	180 / 109 / 153 / 80	180 / 98 / 80 / 69
<b>Environmental</b>				
Environmental type / IP Rating according to EN 54-24	A, C / IP21C	A, C / IP21C	A / IP21C	A / IP21C
IP Rating	32	32	32	32
Min/Max Amb Temp	-10°C / 55°C	-10°C / 55°C	-10°C / 55°C	-10°C / 55°C
<b>Mechanical</b>				
Dimensions, mm	Height 108, ø104	Height 116, ø135	Height 110, ø200	Height 120, ø267
Net Weight, kg	0,8	0,9	1,5	1,8
Colour	White (RAL 9003)	White (RAL 9003)	White (RAL 9003)	White (RAL 9003)
Material	Steel	Steel	Steel	Steel
Mounting	Spring clamp	Spring clamp	Spring clamp	Spring clamp
Cut-out, mm	ø85	ø115	ø170	ø227
<b>Option</b>				
For DC line monitoring	Capacitor	Capacitor	Capacitor	Capacitor
Colour optional	RAL Palette	RAL Palette	RAL Palette	RAL Palette
<b>Ease Model</b>				
		✓	✓	

Frequency band:

**ABT-S106**

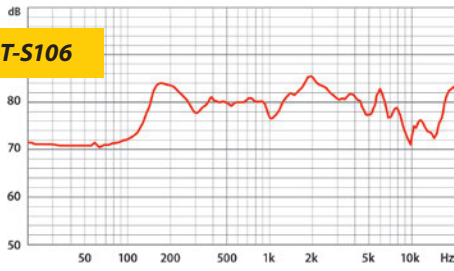


Circular chart of directional characteristic:





Frequency band:

**ABT-S136**

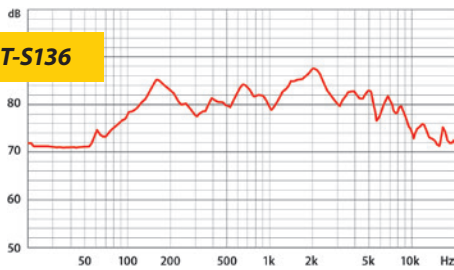


Circular chart of directional characteristic:





Frequency band:

**ABT-S2010**

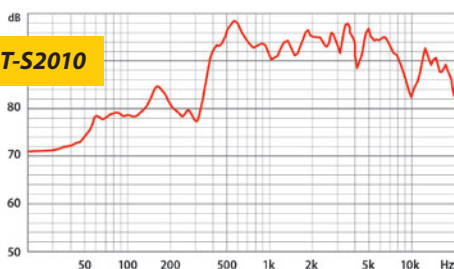


Circular chart of directional characteristic:

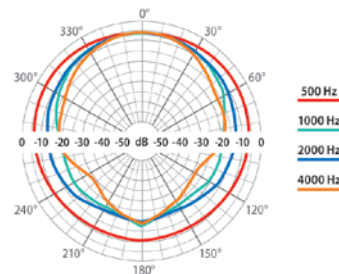

Frequency band:

**ABT-S2710**

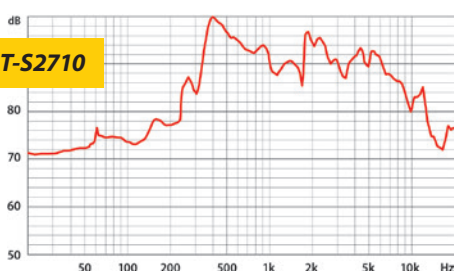

Circular chart of directional characteristic:

