




# ATT-0501/3 & 1001/3 Series Attenuator (Volume Control)

Volume Control

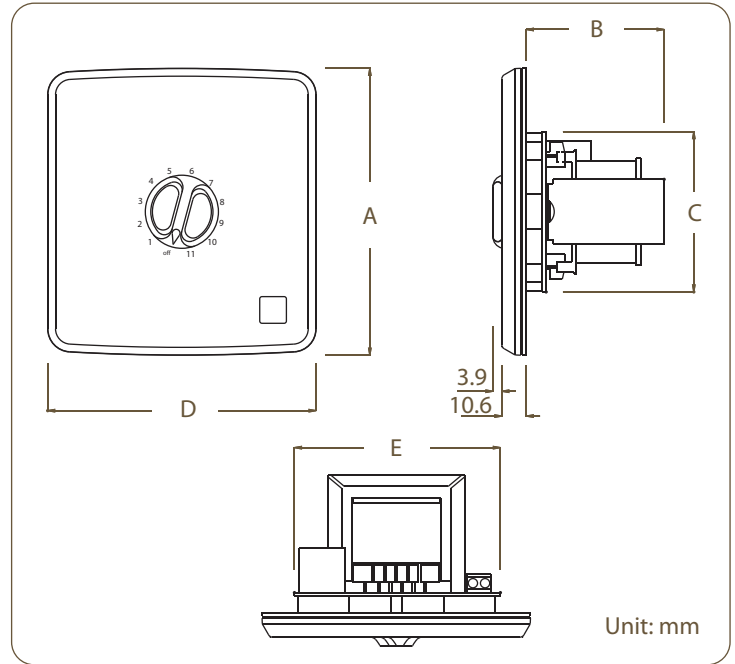

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- Tri-Wire system for emergency paging and override
- Unique Low-profile design
- 12 position (inc. off) "Smooth Click" rotary switch with 360 degree operation
- 50 & 100 watt and 100 volt line options
- Designed for flush mounting or surface mounting via SUB-1000 back box
- High quality auto transformer for excellent frequency response, low insertion loss and reliability
- Hardware free fascia
- Finished in white

Model No.	ATT-0501/3	ATT-1001/3
Rated Power (rms)	50W	100W
Line Voltage	100V	
Switch Position	11 + off	
Attenuation Per Step	3dB (On the last 2 steps the power drops off 6dB per step for better control on the low end)	
Total Attenuation	36dB	
Insertion Loss	Less than 0.5dB	
Plate Size	Double Gang	
Material	Cover & Wall Plate: High Impact ABS	
Colour / Finish	White	
Dimensions A mm (in)	124.0 (4.88)	
Dimensions B mm (in)	52.0 (2.05)	57.0 (2.24)
Dimensions C mm (in)	69.5 (2.74)	
Dimensions D mm (in)	116.0 (4.57)	
Dimensions E mm (in)	89.0 (3.50)	
Net Weight (ea) kg (lb.)	0.54 (1.19)	0.80 (1.76)
Recommended Flush Box	Standard U. S. A. boxes at least 2-1/2" deep or equivalent	