


CODE: **AWO452 v1.4**
 NAME: **EXPANDER 1**

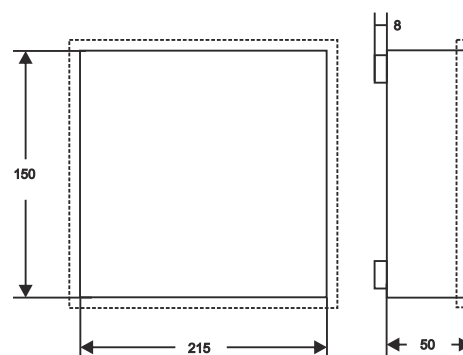

DESTINATION

DSC:

- 1)2x (4108, 5108, 6108, 5208, 5100, 4116)
- 2)1x (4216, 4580, 5400, 5580)

SATEL:

- 1) 2x (CA10E, CA64E, SM, MST1)
- 2) 1x CA64 (PP, EPS, O-OC, O-ROC, O-R, OPS-OC, OPS- ROC, OPS-R, VGM-16, SR, ADR, ACC-KP- PS, PTSA)

PARADOX:

- 1)2x (ZX4, ZX8, HUB2, ADM2, PGM4)

RISCO:

- 1)1x (EZ8, EZ16, E04, E08)

TECHNICAL DATA

Dimensions:	internal: W=215, H=150, D=50 external: W1=220, H1=155, D1=58 [mm, +/-2]
Weight net/gross:	0,70kg / 0,75kg [+/-0,1kg]
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	screwed x 1
Notes:	distance from wall (mounting surface) - 8mm
Certification, declaration:	RoHS