


**D SERIES** video signal distributors

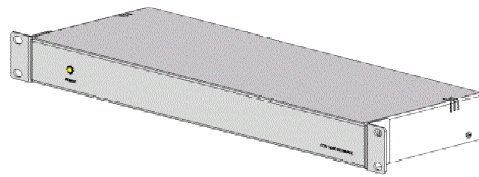

**D2X14R / D4X12R – Front view**

**MODELS**

- D2X14**  
Programmable video signal distributor  
2 IN / 8 OUT
- D2X14R**  
Programmable video signal distributor  
2 IN / 8 OUT, 19" rack 1HE
- D4X12R**  
Programmable video signal distributor  
4 IN / 8 OUT, 19" rack 1HE

The video signal distributor is an essential part of any CCTV surveillance installation. This component enables a camera's video signal to be distributed to several control and/or switching stations without losing in quality.

The **D2X14** unit is a dual distributor with 1 input / 4 outputs having a deviator, easily accessible on the back panel, that offers a selection of different configurations to best suit the CCTV installation requirements. It is also available for assembly on a 19" 1HE rack (**D2X14R**)

The **D4X12R** model is a quadruple distributor with 1 input / 2 outputs, without giving up on versatility of the previous products, it also provides gain adjustment on each individual video output by turning easily accessible trimmers. The case is for 19" rack 1HE.



**D2X14 – Rear view**



**D2X14R – Rear view**



**D4X12R – Rear view**

**TECHNICAL FEATURES**

**Video**

- |                    |                                         |
|--------------------|-----------------------------------------|
| Input signal:      | 1Vpp/75 Ω PAL / NTSC                    |
| Inputs:            | 2 (D2X14-D2X14R)<br>4 (D4X12R)          |
| Outputs:           | 8                                       |
| Video connectors:  | BNC                                     |
| Input impedance:   | 75 Ω                                    |
| Output impedance:  | 75 Ω                                    |
| Video signal gain: | 0 dB (D2X14-D2X14R)<br>+/- 6dB (D4X12R) |
| Passband:          | >10 MHz (-3 dB)                         |

**Electrical**

- |                     |                    |
|---------------------|--------------------|
| PSU input voltage:  | 100-240 V~/47-63Hz |
| PSU output voltage: | 12V=               |
| Power:              | 15 W               |

**Mechanical**

- |                              |                                       |
|------------------------------|---------------------------------------|
| Operating temperature range: | 0°C / +40°C<br>(32°F-104°F)<br>indoor |
| Field of application:        |                                       |
| Dimensions (WxHxD):          |                                       |
| D2X14                        | 294x32x174 mm                         |
| D2X12R                       | Rack 19" 1HE                          |
| D4X12                        | Rack 19" 1HE                          |
| Weight (net, PSU excluded):  |                                       |
| D2X14                        | 1,55 Kg                               |
| D2X14R                       | 2,40 Kg                               |
| D4X12R                       | 2,50 Kg                               |

**Standard kit:**

- Power supply unit
- Mains power cable
- Instruction manual
- Rack brackets (D2X12R and D4X12R only)