


## DS-2CE16D1T-IR HD1080p IR Outdoor Bullet Camera


### TurboHD™

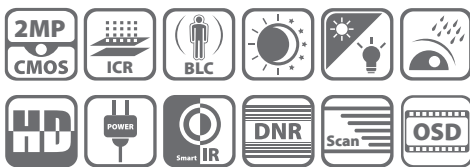

### Key Features

- HD1080p Video Output
- HD-TVI Technology
- True Day/Night, Smart IR
- 65 Feet IR Range
- IP66 Protection
- OSD Menu Controlled via UTC

### Dimensions

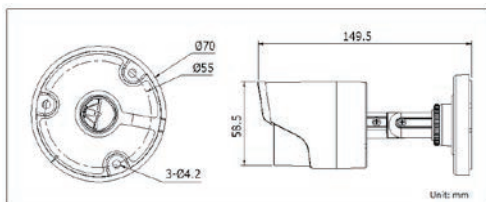

### Accessories



Video Balun  
DS-1H18

### Order Models

DS-2CE16D1T-IR

DS-2CE16D1T-IR	
Camera	
Image Sensor	1/2.7" progressive scan CMOS
HD-TVI Resolution	1920 x 1080
Minimum Illumination	Color: 0.034 @ f/2.5; B/W: 0 with IR
Shutter Speed	1/30 s to 1/50,000 s
Lens	3.6 mm @ f/2.5 (2.8 mm, 6 mm optional)
	Angle of View: 90° (2.8 mm), 80° (3.6 mm), 55.4° (6 mm)
Lens Mount	M12
Day/Night	ICR
Angle Adjustment	3 axis positioning
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 30 fps
HD Video Output	1 analog HD output
S/N Ratio	More than 52 dB
Menu Settings	
Camera ID	On/off (0 to 255)
AGC	Supported
D/N Mode	Color/BW/auto/EXT
White Balance	Auto/User/Push/8000K/6000K/4200K/3000K
Privacy Mask	On/Off, maximum 2 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Supported
Anti-Flicker	On/off
Other	Digital noise reduction, mirror image
General	
Operating Conditions	-40° C to 60° C (-40° F to 140° F) Humidity 90% or less (non-condensing)
Power	12 VDC
Power Consumption	Maximum 3 W
Weatherproof Ratings	IP66
IR Range	65 feet
Communication	Up-the-Coax Protocol: HIKVISION-C
Dimensions	Ø70 mm × 149.5 mm (Ø2.76" × 5.89")
Weight	360 g (0.79 lb)