


CODE: **AWO214 v1.6**
 NAME: **17/TRP40/PAR**

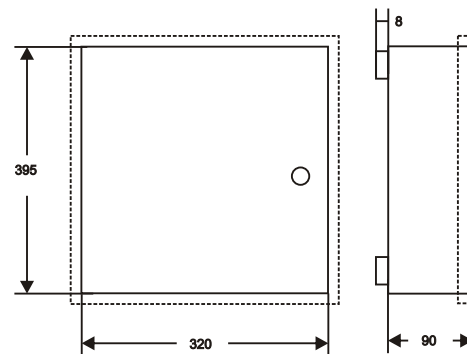

DESTINATION

PARADOX
 CONTROL PANELS:

7Ah:

1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, MG5000, 5050, PS17, ACM12) + 4x ZX8 (6xZX4, APR3- ADM2, APR3- HUB2, PGM4)

17Ah:

1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, MG5000, 5050, PS17, ACM12) + 2x ZX8 (5x ZX4, APR3- ADM2, HUB, PGM4)

TECHNICAL DATA

Dimensions:	internal: W=320, H=395, D=90 external: W1=325, H1=400, D1=98mm [mm, +/-2]
Weight net/gross:	3,80kg / 4,00kg [+/-0,1kg]
Battery space:	17Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRP 40VA/16V/18V in the case of PC/ABC in class UL94-V0, IP20
Power supply:	230V/AC (-15%/+10%), 50Hz, 200mA (max.)
Power supply output:	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)
Operating environment:	class II , -10°C÷ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
Certification, declaration:	CE, RoHS