


CODE: **AWO520PU** v.1.5/II  
 NAME: **24/80/L-F/PUSTA**

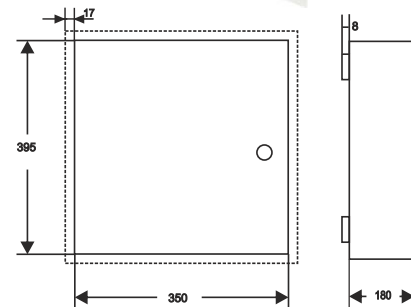

## DESTINATION

### Mounting plate 520 B:

**DSC:** 1) PC1616, 1832, 1864, 4020+ 3x 5108 (4108, 5208, 5100, 4116)

Modules: (PC4216, 5200, 5204, 5400, 5580, 4204)+ 3x (PC4108, 4116, 5100, 5108, 5208)

**PARADOX:** 1) E55, E65, 728ULT, EVO48, 192, SP4000, 5500, 6000, 7000) + 2x ZX8 (APR3- ADM2, APR3- HUB2, PGM4)

**RISCO:** 1) PRO24, 116, 128, 140+ EZ16+ RP296EPS (RP128EPS, EZ8, E04, E08)

**SATEL:** 1) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32+ 2x (CA64E, CA10E, SM, MST1)

2) INTEGRA 64, 128+ CA64E (CA10E, SM, MST1)

Modules: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM16, SR, PTSA)+ 2x (CA64E, CA10E, SM, MST1)

**PYRONIX:** 1) MATRIX 424,816, 832, 832+

**TEXECOM:** 1) PREMIER 412, 816, 832

2) PREMIER 48, 88, 168, 640+ COM 300 (ISDN)

**TELMOR:** 1) TCA824+ TEX800

**ROGER:** 1) PR402, CPR 32-SE

**EBS:** 1) Px202A

**PULSAR:** 1) MS1012, MSR1012, MSRK1012

2) MS2012, MSR2012, MSRK2012

3) MSRK3012

### Mounting plate 520S:

**SATEL:** 1) CA6, 10, VERSA5,10,15, INTEGRA24, 32+ 4x CA64E (CA10E, SM, MST1)

2) CA6, 10, VERSA5,10,15, INTEGRA24, 32+ 3x CA64E (CA10E, SM, MST1)+ CA64 (EPS, O-OC, O-ROC, O-R, VGM-16, SR, ADR, ACC-KP-PS)

3) CA6,10,VERSA5,10,15, INTEGRA 24, 32+ CA64E ( CA10E, SM, MST1)+ 2x CA64 (EPS, O-OC, O-ROC, O-R, VGM-16, SR, ADR, ACC-KP-PS)

4) INTEGRA64, 128+ 3x CA64E (CA10E, SM, MST1)

5) INTEGRA 64, 128+ CA64E (CA10E, SM, MST1)+ CA64 ( EPS, O-OC, O- ROC, O-R, VGM-16, SR, ADR, ACC- KP- PS)

**Modules:** 1) CA64 (PP, OPS-OC, OPS-R, OPS-ROC, EPS, O-OC, O-ROC, O-R, VGM-16, SR, ADR, ACC-KP-PS) +4x CA64E ( CA10E, SM, MST1)

2) CA64 (PP, OPS-OC, OPS-R, OPS-ROC)+ CA64 (EPS, O-OC, O-ROC, O-R, VGM16, SR, ADR, ACC-KP-PS) + 3xCA64E (CA10E, SM, MST1)

3) 2x CA64 (EPS, O-OC, O-ROC, O-R, VGM16, SR, ADR, ACC-KP-PS)+ 3x CA64E (CA10E, SM, MST1)

## TECHNICAL DATA

**Dimensions:** **internal:** W=350, H=395, D=180 **external:** W1=385, H1=430, D1=190mm [mm, +/-2]

**Weight net/gross:** 5,80 / 6,65 [kg]

**Battery space:** 24Ah/12V or 26Ah/12V Sealed Lead Acid (SLA)

**Transformer:** without transformer - can be mounted in the casing: TRZ40, TRZ50, TRZ80

**Tamper protection:** 1 x microswitch: opening, 0,5A@50V/DC max. NC

**Material description:** sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

**Destination:** indoor

**Closing:** lockable (MR 008 - different code)

**Notes:** flush type casing, removable back mounting plate and front frame, easy door removal, additional side mounting plate(s), distance from wall - 8mm

**Declaration, warranty:** CE, warranty – 2 year from the production date