


CIR-SR33DF

Weatherproof Vari-focal IR Camera

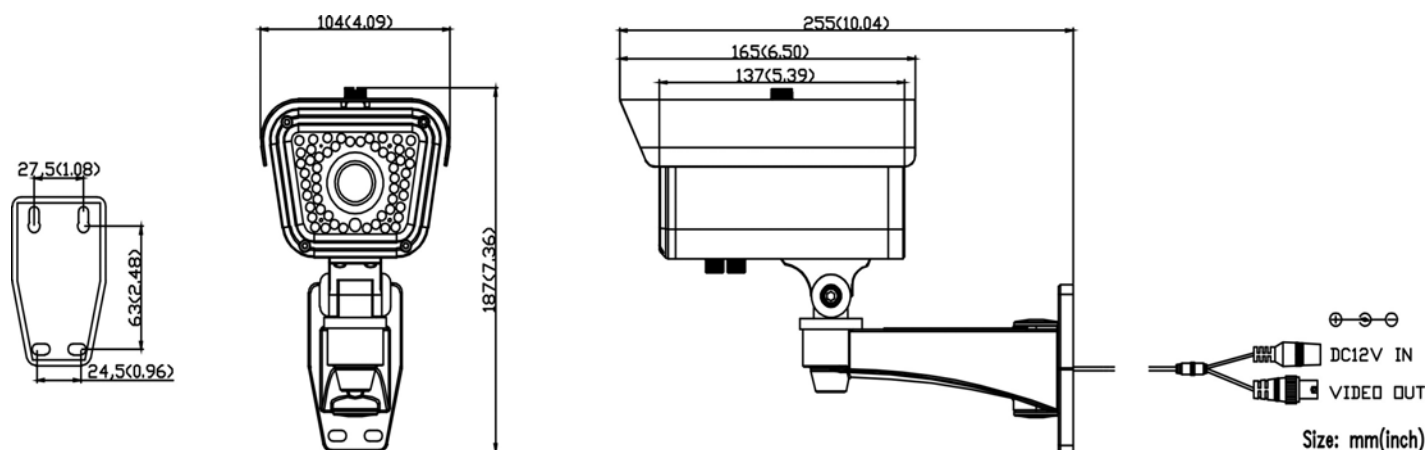

## ● FEATURES

- ◆ 700TVL, 1/3" 960H CCD
- ◆ 2.8-11mm Vari-focal Lens, 54PCs IR LED
- ◆ Viewing Angle: Horizontal:90°~28°
- ◆ IR Range: 15-20M (49.2-65.5ft)
- ◆ Smart IR and DNR function
- ◆ Color changes to B/W while IR LED and ICR start working
- ◆ Constant current circuit design to make sure the lifespan of IR LED
- ◆ Cable Management: Cable through bracket

**Remark: Non-regulative adaptor may cause camera damaged.**

## ● ACCESSORIES

Camera.....	X1
User Manual.....	X1
Screw.....	X4
Plastic-Conical-Anchor.....	X4
Hexagonal Wrench.....	X1
Mounting drawing paper.....	X1

## ● SPECIFICATION

ITEM	CIR-SR33DF
IP Rating	IP66
Type	Colour/Monochrome
Signal System	NTSC/PAL
Pick Up Device	1/3" 960H CCD
Picture Elements	NTSC:1020Hx508V PAL:1020Hx596V
Resolution	700TVL
Min Illumination	0Lux (54Pieces IR LED ON)
Vertical Frequency	NTSC:60Hz; PAL:50Hz
Horizontal Frequency	NTSC:15.734KHz; PAL:15.625KHz
Clock Frequency	NTSC/PAL:36MHz
Scanning System	2:1 Interlace
S/N Ratio	≥52dB
Electronic Shutter	NTSC:1/60-1/100,000s; PAL:1/50-1/100,000s
Lens	2.8-11mm Varifocal Fixed Iris Lens
White Balance	ATW
Back Light	OFF
Auto Gain Control	ON
IR SMART	ON
GAMMA	0.45
Video Out-put	1V p-p,75Ω
Power Supply	DC12V ±10%
Current Consumption	380mA (Max)
IR Effect Distance	15-20m (49.2-65.6ft)
Dimension	255x104x187mm (10.04"×4.09"×7.36")
Weight	1100g (38.8oz)
Storage Temperature	-30~+60°C (-22~+140°F)
Operating Temperature	-30~+40°C (-22~+104°F)

## ● PACKAGE

Weight .....1100g  
 Dimension ..... 255x187x104mm  
 Quantity per carton .....12PCs  
 Dimension of carton.....440x595x475mm  
 Weight of carton.....20.3KGs