

## DS-2AE5230T

### E Series 5 Inch turbo HD1080p PTZ Dome Camera



## Key features

### System function:

- 1/3" high performance CMOS, up to 1920x1080 resolution
- $\pm 0.1^\circ$  Preset Accuracy
- Self-adaptive to HIKVISION, Pelco-P/D protocol
- 3D intelligent positioning function
- Power-off memory function: restore PTZ & Lens status after reboot
- Built-in temperature sensor, with display of internal temperature
- Lightning protection, surge protection and voltage transient protection
- IP66 standard (outdoor dome)
- Impact Protection: IEC60068-2-75 test, Eh, 20J; EN50102, up to IK10
- RS-485 communication diagnosis
- Scheduled PTZ movement
- UTC(Up the Coax) function

### Camera function:

- Auto focus, auto white balance, backlight compensation and auto/manual day & night switch
- Privacy masks programmable
- 3D DNR, digital WDR

### PTZ function:

- 360° endless pan range and  $-5^\circ$ - $90^\circ$  tilt range
- 300°/s Pan Preset Speed and 200°/s Tilt Preset Speed
- 0.1°-250°/s Manual Pan Speed and 0.1°-150°/s Manual Tilt Speed
- 256 presets programmable; preset image freezing capability
- 8 patrols, up to 32 presets per patrol
- 4 patterns, with the total recording time not less than 10 minutes
- Proportional zoom function
- Park action: auto call up of PTZ movement, after a defined time of inactivity

## Application Scenarios


It can be widely applied to places requiring wide-area monitoring display, such as rivers, forests, highways, railways, airports, ports, sentries, squares, parks, scenic sites, streets, stations, large venues, outside of residential areas, etc., and the auto tracking function can be applied to the perimeter protection scenes, e.g., the perimeter of airport, harbor, and residential community.

## Specifications

Parameter		Model	DS-2AE5230T-A: 24VAC, Outdoor DS-2AE5230T-A3: 24VAC, Indoor
		E Series 5 Inch turbo HD1080p PTZ Dome Camera	
Camera	Image Sensor	1/3" CMOS	
	Max. Image Resolution	1920×1080	
	Frame Rate	50Hz:25fps(1280×1080) 60Hz:30fps(1280×1080)	
	Min. Illumination	Color: 0.02Lux@(F1.6,AGC ON) B/W: 0.002Lux@(F1.6,AGC ON)	
	White Balance	Auto / Manual / ATW / Indoor / Outdoor	
	AGC	Auto / Manual	
	S / N Ratio	≥ 50dB	
	3D DNR	Support	
	Backlight Compensation	Support	
	WDR	Digital WDR	
	Shutter Time	PAL: 1-1/10,000s NTSC: 1-1/10,000s	
	Day & Night	IR Cut Filter	
	Digital Zoom	16x	
	Privacy Mask	8 privacy masks programmable; a maximum of 8 zones can be masked simultaneously on the same video screen	
Focus Model	Auto / Semiautomatic / Manual		
Lens	Focal Length	4-120mm, 30X	
	Zoom Speed	Approx.3.0s(Optical Wide-Tele)	
	Angle of View	58-1.7 degree(Wide-Tele)	
	Min. Working Distance	10-1500mm (Wide-Tele)	
	Aperture	F1.6-F4.4	
Pan and Tilt	Pan Range	360° endless	
	Pan Speed	Pan Manual Speed: 0.1°-250°/s, Pan Preset Speed: 300°/s	
	Tilt Range	-5°-90° (Auto Flip )	
	Tilt Speed	Tilt Manual Speed: 0.1°-150°/s,	

		Tilt Preset Speed: 200°/s
	Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
	Number of Preset	256
	Patrol	8 patrols, up to 32 presets per patrol
	Pattern	4 patterns, with the total recording time not less than 10 minutes
	Power-off Memory	Support
	Park Action	Preset / Patrol / Pattern / Pan scan / Tilt scan / Frame Scan / Random scan / Panorama scan
	PTZ Position Display	On / Off
	Preset Freezing	Support
	Scheduled Task	Preset / Patrol / Pattern / Pan scan / Tilt scan / Frame Scan / Random scan / Panorama scan
	RS-485 communication diagnosis	Support
<b>Input/ Output</b>	Monitor Output	1 turbo HD1080p output 1 CVBS output: 1.0V[p-p] / 75Ω, NTSC (or PAL) composite, BNC
	RS-485 Interface	Half-duplex mode Self-adaptive HIKVISION, Pelco-P, Pelco-D protocol
	UTC function	HIKVISION_C *Need UTC controller if DVR don't support UTC function
<b>General</b>	Menu Language	English, Chinese
	Power	24VAC Outdoor dome: Max. 20W (Heater On), Max. 12W(Heater Off) Indoor dome: Max.12W
	Working Temperature / Humidity	-30 °C-65°C(-22°F-149°F)(outdoor dome) / -10°C-50°C(14°F-122°F)(indoor dome ) 90% or less
	Protection Level	IP66 standard (outdoor dome) TVS 4,000V lightning protection, surge protection and voltage transient protection
	Impact Protection	Outdoor: IEC60068-275Eh, 20J; EN50102, up to IK10 Indoor: IEC60068-275Eh, 10J; EN50102, up to IK09
	Mounting	Various mounting modes optional
	Dimensions	Φ220×305mm (Φ8.66"×12.00")(Outdoor) Φ183.4×243mm(Φ7.22"×9.56") (Indoor) Φ245×236mm(Φ9.65"×9.29") (In-ceiling)
	Weight (approx.)	3Kg (6.61 lbs)
	Mount Option (only suitable for outdoor dome)	Long-arm wall mount: DS-1602ZJ; Corner mount: DS-1602ZJ-corner; Pole Mount: DS-1602ZJ-pole; Power box mount: DS-1602ZJ-box

## Dimensions

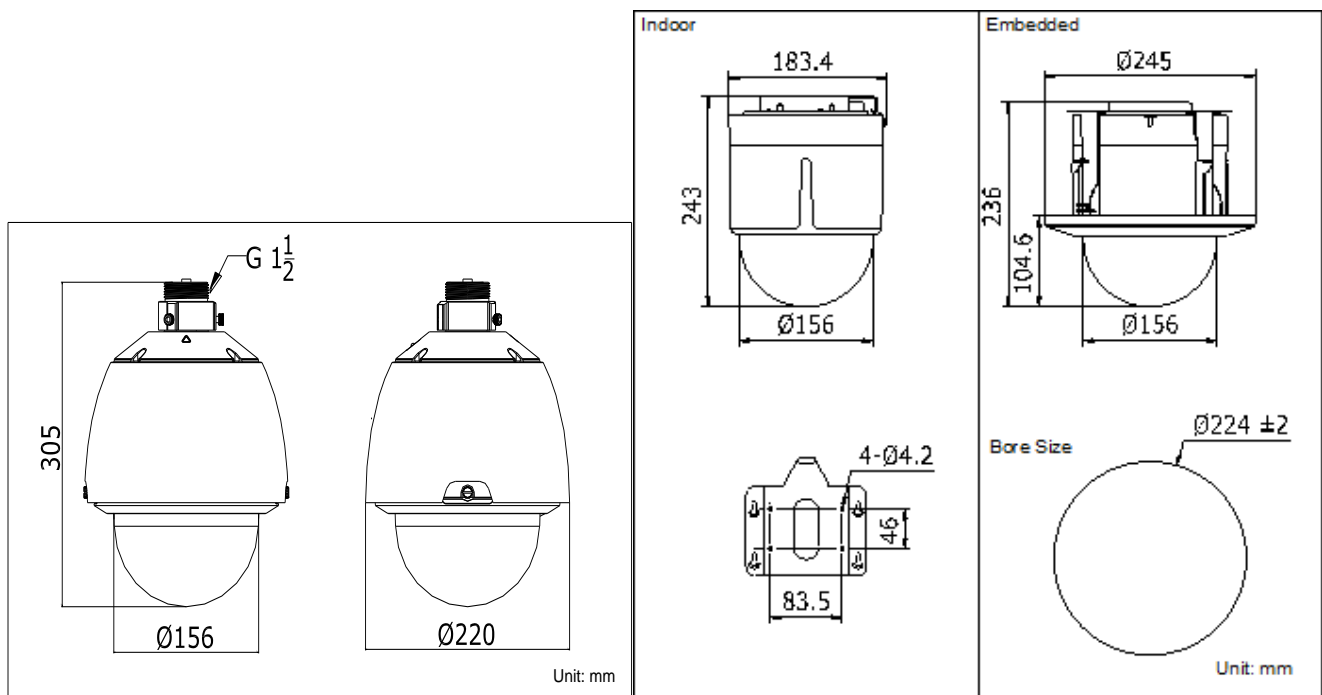

## Order models

- DS-2AE5230T-A, 24VAC, outdoor
- DS-2AE5230T-A3, 24VAC, indoor

## Accessories



DS-1602ZJ Long-arm Wall Mount Bracket