

# DS-2CD2322WD-I

## 2 MP WDR EXIR Turret Network Camera




### Key Features

- 2 Megapixel High Resolution
- Full HD1080p Video
- Dual Video Streams
- 2.8 mm, 4 mm, 6 mm Fixed Lens Options
- 120 db Wide Dynamic Range
- 3D Digital Noise Reduction
- Smart Features
- PoE (802.3af)
- Supports H.264+
- High Performance EXIR LED
- IR Range 30 Meters (~100 Feet)
- IP67 Protection

DS-2CD2322WD-I	
<b>Camera</b>	
Image Sensor	1/2.8" progressive scan CMOS
Minimum Illumination	0.028 lux @ (f/2.0, AGC on), 0 lux with IR
Shutter Speed	1/3 s to 1/10,000 s
Lens	Fixed, 2.8 mm (4 mm, 6 mm options)
Angle of View	109° (2.8 mm), 90° (4 mm), 54° (6 mm)
Lens Mount	M12
Day/Night	IR cut filter with auto switch
Digital Noise Reduction	3D Digital Noise Reduction
Wide Dynamic Range	120 dB
Pan/Tilt/Rotation	Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360°
<b>Compression Standards</b>	
Video Compression	H.264+, H.264, MJPEG
H.264 Type	Main Profile
Video Bit Rate	32 Kbps to 16 Mbps
Dual Streams	Yes
<b>Image</b>	
Maximum Resolution	1920 x 1080
Frame Rate	30 fps (1920 × 1080), (1280 × 960), (1280 × 720)
Image Settings	Compression, color, saturation, brightness, contrast, sharpness, rotate mode, privacy mask
Back Light Compensation	Yes, zone configured
Region of Interest (ROI)	Yes
<b>Analytics</b>	
Smart Features	Line crossing detection, intrusion detection
<b>Network</b>	
Network Storage	NAS (supports NFS,SMB/CIFS), ANR
Alarm Triggers	Motion detection, line crossing detection, intrusion detection, tamper alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RT SP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	Three level user authentication, password authorization, HTTPS and SSH certificate, IEEE802.1X, basic and digest authentication, watermark, IP address filtering, log-in lockout
Standards	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
<b>Interface</b>	
Communication	1 RJ-45 10M/100M Ethernet port
<b>General</b>	
Operating Conditions	-30° C to 60° C (14° F to 140° F), humidity 95% or less (non-condensing)
Power	12 VDC ±10%, PoE (802.3af)
Power Consumption	Maximum 7.5 W with ICR on
IR Range	30 meters (~100 feet)
Ingress Protection	IP67
Dimensions	Φ127 mm × 97.5 mm (5.0" × 3.8")
Weight	670 g (1.5 lbs)

### Dimensions

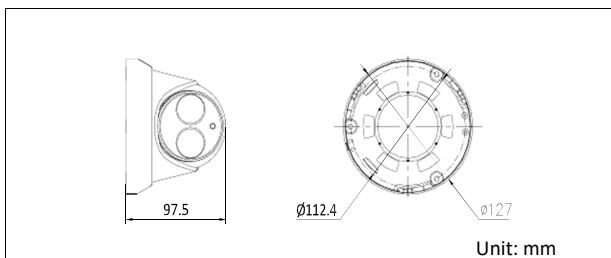

### Order Model

DS-2CD2322WD-I

### Accessories

