

DS-2CE56D1T-IR

HD1080P IR Turret Camera


TURBO HD



Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night, Smart IR
- Up to 20m IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

Dimensions

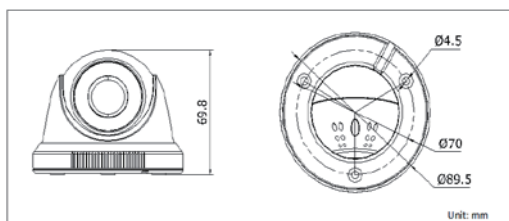

Accessories



Video balun
DS-1H18

Available models

DS-2CE56D1T-IR

DS-2CE56D1T-IR		
Camera		
Image Sensor	1 / 3" Progressive Scan CMOS	1 / 2.7" Progressive Scan CMOS
Signal System	PAL / NTSC	
Effective Pixels	1930(H)*1088(V)	
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR	
Shutter speed	1/25(1/30) s to 1/50,000 s	
Lens	2.8mm	3.6mm (6mm optional)
	Angle of View: 90°(2.8mm)	Angle of View: 80°(3.6mm), 55.4°(6mm)
Lens Mount	φ14	
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°	
Day & Night	ICR	
Synchronization	Internal synchronization	
Video Frame Rate	1080p@25fps/1080p@30fps	
HD Video Output	1 Analog HD output	
S / N Ratio	More than 52dB	
Menu		
Camera ID	On/off (0-255)	
AGC	Support	
D/N Mode	Color/ BW/ Auto/ EXT	
White Balance	Auto/ User/ Push/ 8000K/ 6000K/ 4200K/ 3000K	
Privacy Mask	On/ Off, maximum 2 zones	
Motion Detection	On/ Off, maximum 4 zones	
BLC	Support	
Anti-flicker	On/off	
Language	English/ Chinese	
Function	Digital noise reduction, Mirror	
General		
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)	
Power Supply	12 VDC	
Power Consumption	Max. 3W	
Weather Proof Ratings	IP66	
IR Range	Up to 20m	
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)	
Dimensions	Φ 89.5 × 69.8 mm (Φ 3.52" × 2.75")	
Weight	400g (0.88 lb)	

PTZ DOME

NETWORK

ANALOG

DVR

NVR

ATM DVR

VIDEO ENCODER

CARD

NETWORK STORAGE