

**DS-2DY5223IW-AE
2MP 23X Ultra-low illumination IR Positioning
System Lite****DARKFIGHTER**

Hikvision darkfighter series DS-2DY5223IW-AE Network IR Positioning System Lite is able to capture high quality images in dim light environment. Embedded with 1/1.9" progressive scan CMOS chip makes true WDR and 2MP real-time resolution possible. With the 23X optical zoom Day/Night lens, the positioning system offers more details over expansive areas.

Hikvision darkfighter series DS-2DY5223IW-AE Network IR Positioning System Lite also features Smart Defog and EIS (Electronic Image Stabilization), which can further supported to improve image quality in challenging conditions.

Key Features

- 2MP, 1920 x 1080
- 23X optical zoom, 16X digital zoom
- Ultra-low illumination (0.002Lux/F1.5(color), 0.0002Lux/F1.5(black), 0 Lux with IR)
- Low bit rate, true WDR, Defog, Smart IR
- 3D intelligent positioning
- Power-off memory, proportional zoom
- Analog/Network dual output
- Support Wiper
- Up to 150m IR distance
- Support Hi-PoE

www.hikvision.com

DS-2DY5223IW-AE

2MP 23X Ultra-low illumination IR Positioning System Lite

DARKFIGHTER



Function Description

Basic function:

- High performance CMOS, up to 1920x1080 resolution
- $\pm 0.1^\circ$ Preset Accuracy
- ONVIF(Open Network Video Interface Forum), CGI(Common Gateway Interface), PSIA(Physical Security Interoperability Alliance), to ensure greater interoperability between different platforms and compatibility
- 3D intelligent positioning function
- 3D DNR
- IP66 standard
- 7 alarm inputs and 2 alarm outputs
- Support Hi-PoE

Smart function:

- Smart image processing: support defog, HLC/BLC
- Smart codec: low bit rate, ROI
- Smart detection: support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection

Camera function:

- Auto iris, auto focus, auto white balance, backlight compensation and auto day & night switch
- Min. Illumination: Color: 0.002Lux @ (F1.5, AGC ON), B/W: 0.0002Lux @ (F1.5, AGC ON)
- Support 24 privacy masks

PTZ function:

- 360° endless pan range and -90° ~ 90° tilt range
- 0.1° ~ 200° /s Manual Pan Speed and 0.1° ~ 50° /s Manual Tilt Speed
- 300 presets programmable; preset image freezing capability
- 8 patrols, up to 32 presets per patrol
- 4 patterns, with the recording time not less than 10 minutes per pattern
- Proportional zoom function
- Park action: auto call up of PTZ movement, after a defined time of inactivity

- Power-off memory: restore PTZ & Lens status after reboot

Network function:

- H.264/MJPEG video compression
- H.264 encoding with Baseline/Main/High profile
- ROI(Region of Interest) encoding(support 12 areas with adjustable levels)
- Built-in Web server
- Onboard storage, up to 128GB
- Support up to 8 NAS storage; Edge recording(transmit the videos from SD card to the NAS after network resumed)
- HTTPS encryption and IEEE 802.1X port-based network access control
- Support trip-streams
- Multiple network protocols supported: IPv4/Ipv6, HTTP, HTTPS, 802.1X, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, ICMP, DHCP, PPPoE
- 1 audio input and 1 audio output

DS-2DY5223IW-AE

2MP 23X Ultra-low illumination IR Positioning System Lite



DARKFIGHTER

Model		DS-2DY5223IW-AE
Camera Module		
Image Sensor		1/1.9" Progressive Scan CMOS
Max. Image Resolution		1920 X 1080
Min. Illumination		Color: 0.002Lux @ (F1.5, AGC ON) B/W: 0.0002Lux @ (F1.5, AGC ON)
Day & Night		ICR
Focus Mode		Auto / Semiautomatic / Manual
Shutter Time		1/1-1/10,000s
S / N Ratio		>52dB
Digital Zoom		16X
White Balance		Auto / Manual /ATW/Indoor/Outdoor/Daylight lamp/Sodium lamp
AGC		Auto / Manual
Lens		
Focal Length		5.9-135.7mm, 23X
Angle of View		59.8° -3.0° (Wide-Tele)
Min. Working Distance		10-1500mm(Wide-Tele)
Aperture Range		F1.5-F3.4
Image		
Main Stream		50Hz:25fps(1920×1080), 25fps(1280×720) 60Hz:30fps(1920×1080), 30fps(1280×720)
Sub Stream		50Hz:25fps(704×576), 25fps(352×288), 25fps(176×144) 60Hz:30fps(704×480), 30fps(352×240), 30fps(176×120)
Image Compression		H.264(Baseline, Main, High Profile)/MJPEG
Audio Compression		G.711ulaw/G.711alaw/G.726/MP2L2/G.722/PCM
SVC		Support
Protocols		IPv4/IPv6,HTTP,HTTPS,802.1x,QoS,FTP,SMTP,UPnP,SNMP,DNS,DDNS,NTP,RTSP,RTP,TCP,UDP,IGMP,ICMP,DHCP,PPPoE
Standard		ONVIF, PSIA, CGI, Genetec
Others		Defog, EIS, Privacy Mask, 3D DNR, BLC, true WDR
Smart Features		
Smart detection		Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection
ROI encoding		Support 12 areas with adjustable levels
Infrared		
IR Distance		Up to 150m
IR Intensity		Automatically adjusted, depending on the zoom ratio
Pan and Tilt		
Movement Range		Pan: 360° endless, Tilt: +90° ~-90°
Movement Speed		Pan: 0.1° -200° /s, Tilt: 0.1° -50° /s
Number of Preset		300
Patrol		8 patrols, up to 32 presets per patrol
Pattern		4 patterns, with the recording time not less than 10 minutes per pattern
Park		Support

HIKVISION

DS-2DY5223IW-AE


2MP 23X Ultra-low illumination IR Positioning System Lite



DARKFIGHTER

Proportional Zoom	Support
PTZ Position Display	On / Off
Simultaneous Live View	Up to 20 users
System Integration	
Menu	English
3D Positioning	Support
Preset Freezing	Support
Scheduled Task	Support
Alarm I/O	7 alarm inputs, 2 alarm outputs
Ethernet	1 RJ45 10M/100M Ethernet interface
CVBS Output	1.0V[p-p] / 75Ω, NTSC (or PAL) composite, BNC
RS485	Half duplex, HIKVISION, Pelco-P, Pelco-D, self-Al2daptive
Onboard Storage	Built-in Micro SD/SDXC card slot, up to 128GB, manual/alarm recording, ANR
Number of Simultaneous Live View	Up to 20
User/Host Level	Up to 32 users, 3 Levels: Administrator, Operator and User
General	
Power	Hi-PoE&24 VAC, Max. 45W
Working Temperature/Humidity	-40° C ~ 65° C, humidity 90% or less
Protection Level	IP66 standard, TVS 6,000V lightning protection, surge protection and voltage transient protection
Dimensions(mm)	306 × 167 × 212
Weight(approx.)	7.8kg

Dimensions

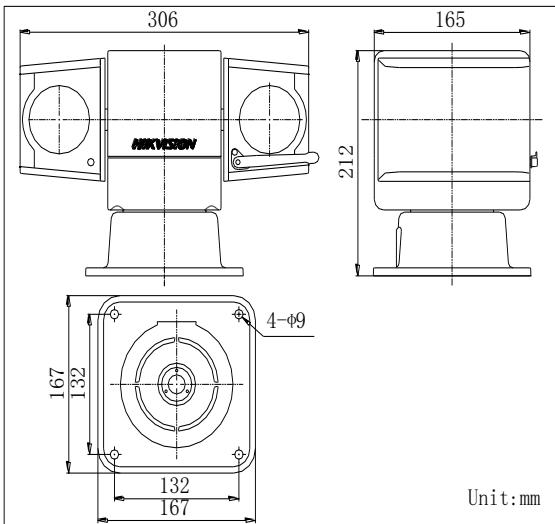

HIKVISION