

# PS series power supply

Enclosed, 24VDC switch mode power supply



CODE: PS-1502450  
TYPE: PS 24V/5A enclosed switch mode power supply

EN/V

## Features of the power supply unit:

- power output 5A/24÷28VDC\*
- wide AC input voltage range 176÷264V
- high efficiency 85%
- LED optical signalisation
- protections:
  - SCP short-circuit protection
  - overvoltage OVP
  - overvoltage protection
  - overload (OLP)
- warranty – 2 year from the production date



## DESCRIPTION

The power supply unit is intended for the feeding of alarm system equipments, which require 24V DC supply voltage and current load  $I=5A$ . The design enables simple changing of the output voltage, within the range of 24V÷28V DC, using a potentiometer. The power supply unit is protected against short-circuit, overload and overvoltage.

## TECHNICAL DATA

Supply voltage	176 ÷ 264 V AC
Current consumption	1,1A@230VAC max.
Supply power	150W max.
Efficiency	85%
Output voltage	24V DC
Output current $t_{AMB}<30^{\circ}C$	5 A - see graph 1.
Output current $t_{AMB}=40^{\circ}C$	3,5 A - see graph 1.
Voltage adjustment range	24 V ÷ 28V DC
Ripple voltage	150mV p-p max.
Short-circuit protection SCP	electronic (activation requires disconnecting load or supply for about 5 s.)
Overload protection OLP	105-150% of power supply (activation requires disconnecting load or supply for about 5 s.)
Surge protection	varistors
Overvoltage protection OVP	>32V (activation requires disconnecting the load or supply for about 20 s.)
Optical signalisation	green LED – presence of DC voltage
Operation conditions	2-nd environmental class, temperature: $-10^{\circ}C+40^{\circ}C$ relative humidity 20%...90%, without condensation
Dimensions (LxWxH)	199 x 110 x 50 [mm]
Net/gross weight	0,73kg / 0,78kg
Protection class PN-EN 60950-1:2007	I (first) – requires a protective conductor (PE)
Connectors	power-supply: $\Phi 0,63-2,50$ (AWG 22-10) outputs : $\Phi 0,63-2,50$ (AWG 22-10)
Declarations, warranty	CE, RoHS, 2 year from the production date

\* In order to extend the life of the power supply, the load current of 3,5A is recommended.


\* See graph 1.

# PS series power supply

Enclosed, 24VDC switch mode power supply



## Output current vs temperature

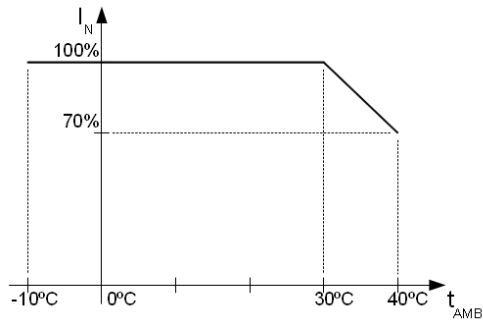

Graph 1.  
Allowable output current from the power supply depending on ambient temperature (instantaneous load).

## Dimensions and fitting of the PS-1502450 power supply

