

# PSB series power supply



Enclosed, switch mode buffer power supply 13,8V DC, without automatic operation control

CODE: **PSB-1001270** v1.0/IV

EN

TYPE: **PSB 13.8V/7A enclosed switch mode buffer power supply**

### Features of the power supply:

- DC 13,8V/7A uninterruptible power supply\*
- wide AC input voltage range 176÷264V
- high efficiency 80%
- controlling of battery charging and maintaining
- protecting of battery against excessive discharging (UVP)
- battery charging current 1A/2A, changed by jumper
- additional accessories: automation module MPSB12 (technical outputs):
  - EPS technical output indicating AC power loss
  - PSU technical output indicating PSU failure
  - LoB technical output indicating battery low voltage
- battery output is full protected against short-circuit and reverse connection
- LED optical signalisation
- protections:
  - short-circuit protection SCP
  - over voltage protection OVP
  - surge protection
  - overload protection OLP
- warranty – 2 year from the production date



### DESCRIPTION

Buffer-type power supply units are intended for continuous power supply to devices that require stabilised voltage of **12V DC (+/-15%)**. The power supply provides a voltage of **U=13,8V DC** with an output current of:

**1. Output current of 6A + 1A battery charging\***

**2. Output current of 5A + 2A battery charging\***

**Total device current + battery: 7A max\***

In case of power voltage decay, prompt switching to battery supply occurs. The power supply unit is protected against a short circuit, an overload, a surge or over voltage protection.

### TECHNICAL DATA

Supply voltage	176÷264V AC
Current consumption	0,95A@230VAC max.
Supply power	100W max.
Efficiency	80%
Output voltage	11V± 13,8VDC – buffer operation 9,5V±13,8V DC – battery operation
Output current $t_{AMB}<30^{\circ}\text{C}$	<b>6A + 1A battery charging - see chart 1</b> <b>5A + 2A battery charging - see chart 1</b>
Output current $t_{AMB}=40^{\circ}\text{C}$	<b>4,9A + 1A battery charging - see chart 1</b> <b>3,9A + 2A battery charging - see chart 1</b>
Voltage adjustment range	12÷14V DC
Ripple voltage	120mV p-p max.
Battery charging current	1A or 2A max.
Short-circuit protection SCP	electronic, automatic recovery
Overload protection OLP	105-150% of power supply, automatic recovery
Overload protection (battery) OLP	polymer fuse (PTC)
Surge protection	varistors
Overvoltage protection OVP	>16V (automatic recovery)
Excessive discharge protection UVP	$U<9,5\text{ V } (\pm 5\%)$ – disconnection of battery
Optical signalisation	green LED- presence of AC voltage
Output of optical signalization	LED AC- presence of AC voltage LED DC- presence of DC voltage on power supply output
Additional accessories	Module MPSB12 (technical outputs)
Operation conditions	2-nd enviromental class, temperature: $-10^{\circ}\text{C}$ ÷ $40^{\circ}\text{C}$ relative humidity 20%...90%, without condensation
Dimensions (LxWxH)	199 x 97 x 42 [mm]
Net/gross weight	0,63kg / 0,68kg
Protection class EN 60950-1:2007	I (first) - requires a protective conductor (PE)
Declarations, warranty	CE, RoHS, 2 year from the production date
Connectors	power-supply: $\Phi 0,63\pm 2,5$ I/O PCB : $\Phi 0,41\pm 1,63$ battery output BAT: 6,3F-2,5/40cm, output of optical signalization: plug 3-pin 5 mm

\* See chart 1

# PSB series power supply



Enclosed, switch mode buffer power supply 13,8V DC, without automatic operation control

## Output current vs temperature

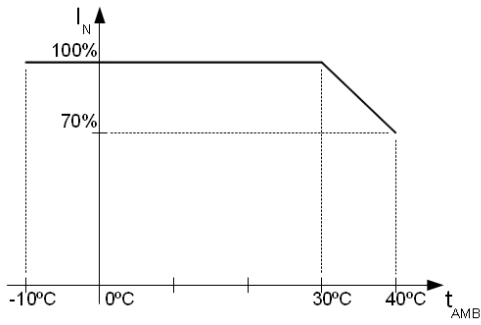


Chart 1.  
Allowable output current from the power supply depending on ambient temperature.

## Dimensions and fitting of the PSB-1001270 power supply

