

SSV-D49EF/9 SSV-D49EF/12

WDR High Res. Color OSD Dome




Specifications

Model	SSV-D49EF/9	SSV-D49EF/12
Image		
Device	SONY 960H DS CCD	
Size	1/3"	
Pixels(HxV)	NTSC: 1028(H)*508(V)/ PAL: 1024(H)*596(V)	
Resolution	650 TVL	
Min.Scene Illumination		
Color	0.1 Lux @F2.0	
B/W	N/A	
Lens		
Focal Length	4-9.0mm Lens	2.8-12.0mm Lens
Synchronization		
Sync. System	2:1 Interlace	
S/N Ratio	Better than 48 dB	
Functions		
Electronic Shutter	Auto and up to 1/100,000	
Auto White Balance	Full Auto	
Auto Gain Control	Full Auto	
Aperture Correction	2H Mode of H.V aperture correction	
Digital Noise Reduciton	2D DNR	
Sense-Up	Auto / off	
Video Output	1.0 Vp-p Composite Video Output/Ohms	
GAMMA	0.45	
Environmental		
Operating Temperature	- 10°C~ + 50°C degree	
Conditions		
Operating Humidity	RH 85% or Less	
Power		
Power Consumption	DC 12V / 1.5W Total: DC 12V / 8.5W	
Power Supply	DC 12V	
Physical Specification		
Dimensions	420mm*130mm	

Feature

- WDR High Res. Color OSD Dome
- 650 TVL
- 0.1 Lux / F2.0
- SSV-D49EF/9:4-9.0mm Lens
- SSV-D49EF/12 :2.8-12.0mm Lens
- ATW With MCT Technology (Multi-Color Temp)
- Auto Gain Control
- Auto Back Light Compensation
- 2H Mode of H.V aperture correction
- DC12V

Dimension(unit:mm)

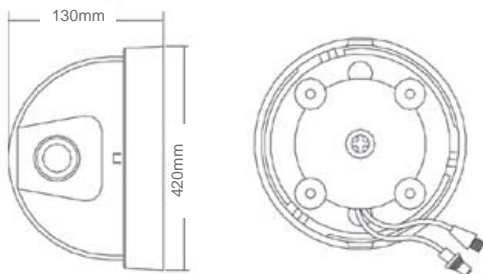

More information is available at www.jsctv.com



J&S United Technology Corp.
13F-6, No. 258, Lian-Cheng Rd., Chung-Ho City, Taipei County 235, Taiwan
TEL.: +886-2-8227-2528 FAX: +886-2-8227-2338
www.jsctv.com.tw

