


SYRDK2

Touch Keypad Reader

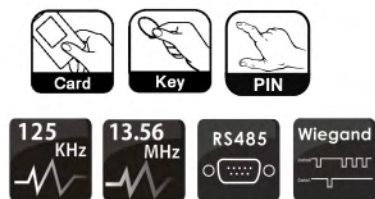

SYRIS
ACCESS Reader
SYRIS Security System

Feature

- Slim, stylish design, sensitive touch keypad with white backlight.
- Built-in Anti-Tamper protection / Buzzer.
- Reliable & Easy installation.
- Communication: Wiegand / Rs485.
- Multi Access Mode for SYRDK2 : **Card / Card+Pin / Pin.**
- Built-in Watchdog to prevent system from halting.



- Slim, stylish design / Mounting directly to wall.

Specification

Specs / Item	SYRDK2
Transmit Frequency	125KHz / 13.56MHz
Read Range	5~10cm / 2~6cm
Baud Rate	19,200 bps (4,800~230,400 bps)
Support Card	EM or ISO14443A/B/15693/Mifare
Keypad	12 keys
LED Indicator	3 LED (RGB)
Communication	RS485 , Wiegand(26/32/34/35/37/42/50/66 bits)
ID	0,001 ~ 9,999
Anti-Tamper Facility	Built-in(IR)
Beep Tone	Built-in Buzzer
Operating Temperature	-20°C ~ +70°C
Input Voltage	8V~28V DC / 0.5~2W
Dimensions (W x H x D)	89.4 x 124 x 12 mm

❖ This specification is preliminary and subject to change without prior notice.

Ordering Information

Item	Type
■ SYRDK2-L1	Touch Keypad Reader-LF
■ SYRDK2-H1	Touch Keypad Reader-HF

Copyright © 2012 SYRIS Technology Corp.