

DS-2CD2412F-I (W) (1.3MP)/DS-2CD2432F-I (W)(3MP)


IR Cube Network Camera



Key features

- 1.3MP / 3MP high resolution
- HD real-time video
- PIR detection
- IR LEDs (up to 10m)
- DWDR & 3D DNR & BLC
- PoE
- SD/SDHC/SDXC card slot (up to 64GB)
- Wi-Fi optional (WPS connection)

Dimensions

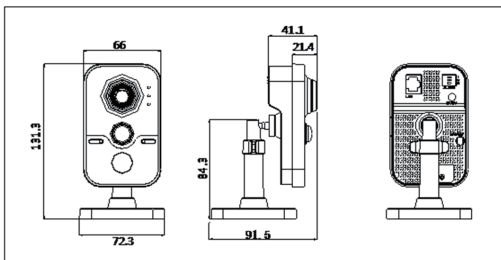

Available models

DS-2CD2412F-I, DS-2CD2412F-IW
DS-2CD2432F-I, DS-2CD2432F-IW

* -W: Wi-Fi

	DS-2CD2412F-I (W)	DS-2CD2432F-I (W)
Camera		
Image sensor	1/3" progressive scan CMOS	
Min. illumination	0.01 lux @F1.2, AGC ON, 0 lux with IR	0.07Lux @(F1.2,AGC ON) ,0 Lux with IR
Shutter time	1/3s - 1/100,000s	
Lens	4mm@ F2.0 (2.8mm, 6mm optional)	4mm@ F2.0 (2.8mm, 6mm optional)
	Angle of view: 92.5°(2.8mm), 73.1°(4mm), 46°(6mm)	2048 × 1536: Angle of view: 86°(2.8mm), 70°(4mm), 43.3°(6mm) 1920 × 1080:Angle of view: 98.5°(2.8mm), 79°(4mm), 49°(6mm)
Lens mount	M12	
Day & night	IR cut filter with auto switch	
Digital noise reduction	3D DNR	
Wide dynamic range	Digital WDR	
Backlight compensation	Yes, zone configurable	
Compression Standard		
Video compression	H.264 / MJPEG	
H.264 codec profile	Main profile	
Bit rate	32 Kbps ~ 12 Mbps	
Audio compression	G.711/G.722.1/G.726/MP2L2	
Audio bit rate	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)	
Image		
Max. Image Resolution	1280 × 960	2048 × 1536
Frame rate	50 Hz: 25 fps (1280 × 960), 25 fps (1280 x720), 25 fps (704 × 576), 25 fps (640 × 480)	50Hz: 20fps (2048 × 1536), 25fps (1920 × 1080), 25fps (1280 × 720)
	60 Hz: 30 fps (1280 × 960), 30 fps (1280 x720), 30 fps (704 × 576), 30 fps (640 × 480)	60Hz: 20fps (2048 × 1536), 30fps (1920 × 1080), 30fps (1280 × 720)
Image settings	Rotate mode, Saturation, brightness, contrast, sharpness adjustable through client software or web browser	
ROI	Support	
Network		
Network storage	Local storage: Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB. NAS (Support NFS, SMB/CIFS)	
Alarm trigger	Motion detection, Dynamic Analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception, Intrusion detection, Line crossing detection	
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP, PPPoE,NTP,UPnP,SMTP,SNMP,IGMP,802.1X,QoS,IPv6,Bonjour	
System compatibility	ONVIF, PSIA, CGI, ISAPI	
General functionalities	Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark	
Interface		
Communication interface	1 RJ45 10 M / 100 M Ethernet interface	
Onboard storage	Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB	
Alarm I/O	1/1	
Wi-Fi parameters (only for -W model)		
Wi-Fi standard	IEEE802.11b, 802.11g, 802.11n	
Frequency range	2.4 GHz ~ 2.4835 GHz	
Communication bandwidth	Support 20/40 MHz	
Protocols	802.11b: CCK, QPSK, BPSK; 802.11g/n: OFDM	
802.11g/n: OFDM	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS	
Transmission rate	11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps	
Transmission range	50m(depend on environment)	
Wireless Standards	IEEE802.11b, 802.11g, 802.11n	
General		
Operating conditions	-30 °C – 60 °C Humidity 95% or less (non-condensing)	
Power supply	DC12V±10% / PoE(802.3af)	
Power consumption	Max. 5W	
PIR	Angle: 80°	
	Range: 10m	
IR range	10 meters	
Dimension	72.3×91.5×131.3(2.85"×3.60" ×5.17")	
Weight	400g(0.88lbs)	

* "-W" series support Wi-Fi (802.11b/g/n) and the modules with Wi-Fi function don't support the 802.1X protocol.

*Without power adaptor in the case by default.