

SSV-820EX

Color 15M IR OSD Camera




Feature

- Sony CCD
- 530 TVL
- 0.01 Lux @F2.0 / 0 Lux (LED ON) Motion Detection
- OSD menu
- Digital Noise Reduciton 2D
- DC12V
- 20 pieces IR-LED, 15M Illumination Distance

Specifications

Model	SSV-820EX
Image	
Divice	1/3" SONY CCD
Size	1/3"
Pixels(HxV)	NTSC:768(H) x 492(V)/ PAL:752(H)x 582(V)
Resolution	530 TVL
Min.Scene Illumination	
Color	0.01 Lux @F2.0 / 0 Lux (LED ON)
B/W	N/A
Lens	
Focal Lenght	4.0 mm Lens
Synchronization	
Sync. System	Interlace / Line lock
S/N Ratio	
S/N Ratio	More than 52 dB (AGC off , Weight on)
Functions	
Electronic Shutter	Auto: 1/50(60) ~1/100,000 sec
Auto White Balance	ATW/AWB/AWC/MANUAL
Auto Gain Control	Auto
OSD menu	OSD control
Digital Day/Night	Auto
BLC	WDR / BLC / OFF
Digital Noise Reduciton	2D
IR LED	20*IR-LEDs
WDR	510x normal camera(54dB)
Motiom	ON/OFF
Illuminate Distance	15M
flickless	ON/OFF
Environmental	
Operating Temperature	- 10°C~ + 50°C degree
Power	
Power Consumption	DC 12V / 1.5W & Total : DC 12V / 8.5W
Physical Specifi cation	
Dimension	98mm(Dia.) x 190mm (L)
Weight	470g

Dimension(unit:mm)

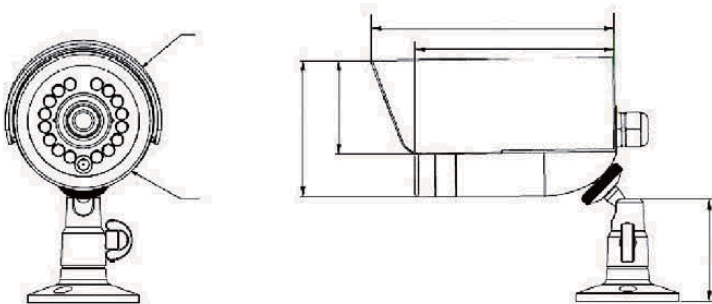

J&S United Technology Corp.
13F-6, No. 258, Lian-Cheng Rd., Chung-Ho City, Taipei County 235, Taiwan
TEL.: +886-2-8227-2528 FAX: +886-2-8227-2338
www.jsctv.com.tw

